

# TC COAT

**CEMKRETE®**

ISO 9001 &amp; 14000 CERTIFIED

A WATER BASED COURTS SYSTEM

**DESCRIPTION**

TC COAT is a single component water-based system specially formulated to be used for tennis courts / badminton courts.

**USES**

Consisted of high performance primer, binder and finishing coat for interior and exterior uses which when combined with selected aggregates to form a hard but shock absorbing, abrasive resistant surface specially for court construction.

**BENEFITS**

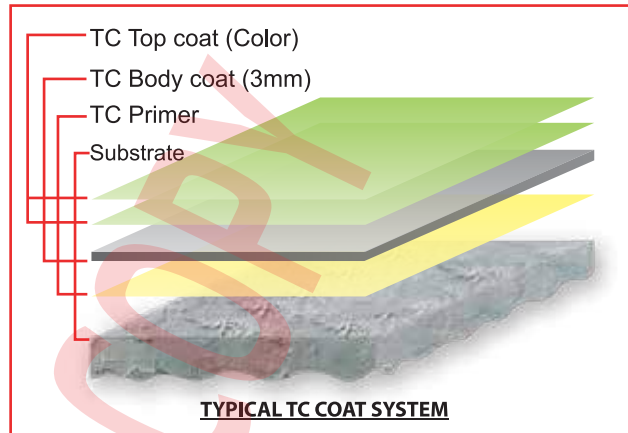
- Excellent abrasion resistance.
- Excellent weatherability.
- Excellent adhesion to base surface.
- Good alkaline and mild chemical resistance.
- Excellent workability due to single component product. Multiple coat and repair coating without great effort.

**COLOR**

Available in Standard Courts Colors.  
Other colors can be matched upon request.

**FINISH**

Semi Gloss to matt.

**TYPICAL TC COAT SYSTEM****Technical Data :**

No of Component	1
No of Coats Recommended	Multiple
Recommended Dry Film Thickness	2 - 3 mm
Estimated Coverage	TC Primer : 8m <sup>2</sup> /kg TC Body Coat : 1 : 6 ratio of binder to aggregate depending on size of aggregate TC Color Top Coat : Apply by roller at 6sq m/kg/coat recommended 2 coats
Drying time at 25°C	Touch dry 30 minutes Hard Dry 12 Hours
Re-coating Interval	12 Hours
Bonding Strength	1.5N/mm <sup>2</sup>
Pot Life at 25°C	Not applicable
Cleaner	Water
Storage & Shelf life	Unopened In Dry Conditions at 25°C / 12months
Packaging	5Liters & 20Liters

NOTE: Coverage figure given is theoretical. Due to wastage factors, the variety nature of the substrate, and the site application condition, etc., the practical coverage may be reduced.

The information given in this data sheet is to the best of our knowledge true and accurate; but as we have no control over where or how the product is applied, there are no warranties expressed or implied regarding the product's use or performance. Customers are advised to thoroughly test before adapting them to their own use. It is strongly recommended to trial on small area before large scale application.

WEBSITE

[www.cemkrete.com.my](http://www.cemkrete.com.my)

TELEPHONE

+603-8062 4478

FAX

+603-8061 5877

EMAIL

[enquiry@cemkrete.com.my](mailto:enquiry@cemkrete.com.my)

# TC COAT

**CEMKRETE®**

ISO 9001 &amp; 14000 CERTIFIED

A WATER BASED COURTS SYSTEM

**DESCRIPTION**

TC COAT is a single component water-based system specially formulated to be used for tennis courts / badminton courts.

**USES**

Consisted of high performance primer, binder and finishing coat for interior and exterior uses which when combined with selected aggregates to form a hard but shock absorbing, abrasive resistant surface specially for court construction.

**BENEFITS**

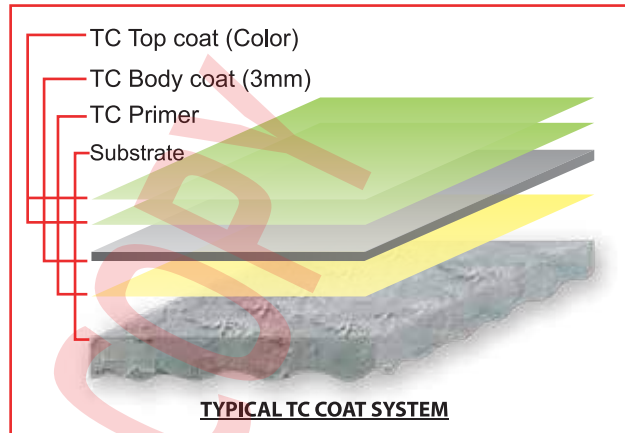
- Excellent abrasion resistance.
- Excellent weatherability.
- Excellent adhesion to base surface.
- Good alkaline and mild chemical resistance.
- Excellent workability due to single component product. Multiple coat and repair coating without great effort.

**COLOR**

Available in Standard Courts Colors.  
Other colors can be matched upon request.

**FINISH**

Semi Gloss to matt.

**TYPICAL TC COAT SYSTEM****Technical Data :**

No of Component	1
No of Coats Recommended	Multiple
Recommended Dry Film Thickness	2 - 3 mm
Estimated Coverage	TC Primer : 8m <sup>2</sup> /kg TC Body Coat : 1 : 6 ratio of binder to aggregate depending on size of aggregate TC Color Top Coat : Apply by roller at 6sq m/kg/coat recommended 2 coats
Drying time at 25°C	Touch dry 30 minutes Hard Dry 12 Hours
Re-coating Interval	12 Hours
Bonding Strength	1.5N/mm <sup>2</sup>
Pot Life at 25°C	Not applicable
Cleaner	Water
Storage & Shelf life	Unopened In Dry Conditions at 25°C / 12months
Packaging	5Liters & 20Liters

NOTE: Coverage figure given is theoretical. Due to wastage factors, the variety nature of the substrate, and the site application condition, etc., the practical coverage may be reduced.

The information given in this data sheet is to the best of our knowledge true and accurate; but as we have no control over where or how the product is applied, there are no warranties expressed or implied regarding the product's use or performance. Customers are advised to thoroughly test before adapting them to their own use. It is strongly recommended to trial on small area before large scale application.

WEBSITE

[www.cemkrete.com.my](http://www.cemkrete.com.my)

TELEPHONE

+603-8062 4478

FAX

+603-8061 5877

EMAIL

[enquiry@cemkrete.com.my](mailto:enquiry@cemkrete.com.my)